

APPLICATIONS:

The KG gravity feed oilers are designed for heavy-duty, high temperature lubricating applications. The rate of oil feed is adjustable and a lock ring maintains the setting. In bearing or gear lubrication, the KG oilers provide dependable lubrication in the most demanding environments.




37016

FEATURES:

- Three position toggle switch provides easy to use on-off control, and a flushing option to avoid dry start-ups.
- Heavy wall glass reservoirs and sight chambers operate continuously at 250°F.
- Vented sight chamber ensures proper operation when used with tight or high speed bearings.
- Copper brazing of all steel connections provides long life and leak proof design.
- Nickel plating offers superior corrosion resistance.

SPECIFICATIONS

Max. Operating Temp.	250°F Continuous
Reservoir	Heavy Wall Heat Resistant Glass
Oil Sight	Heavy Wall Heat Resistant Glass
Gaskets	Buna-N
Materials	Heavy Gauge Steel
Finish	Bright Nickel Plate
Needle Valve	Steel

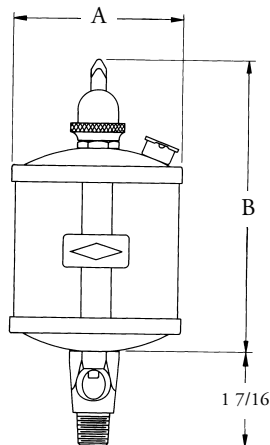

SELECTION CHART

Model No.	Capacity	Connection (NPT)	Dimensions (in.)	
			A	B
37011	1 oz.	1/8	1-5/8	3-1/4
37012	1 oz.	1/4	1-5/8	3-1/4
37013	2.5 oz.	1/8	2-1/8	4
37014	2.5 oz.	1/4	2-1/8	4
37015	5 oz.	1/8	2-5/8	4-5/8
37016	5 oz.	1/4	2-5/8	4-5/8
37017	5 oz.	3/8	2-5/8	4-5/8
37018	10 oz.	1/4	3-1/8	5-3/8
37019	10 oz.	3/8	3-1/8	5-3/8